

DELTA REFLEX SMOKE DETECTOR 230V CAN BE
NETWORKED DIMENSIONS 115MM X 43MM
TITANIUM WHITE



Model		
Type of certification / NCP		No
Cable entry type		Base
Design of fire alarm / Smoke detector		Yes
Design of the product / explosion-proof design		No
Design of transmission medium / wireless transmission		No
General technical data		
Response value temperature	°C	50
Outer diameter / of the enclosure	mm	111
Loudness level	dB	85
Voltage		
voltage supply		230 V AC and 9 V alkaline back-up battery (included in the scope of supply)
Supply voltage		
Type of voltage / of the supply voltage		AC
Protection class		
Protection class IP		IP30


Appearance		
Color		white
Product details		
Product component / Integrated / orientation lighting		No
Product expansion / optional / can be networked with wireless connection		No
Product function		
Product function		
• of backup battery / rechargeable		No
Number		
Number of fire detectors / networkable		1
Mechanical Design		
Height	mm	40
Length	mm	180
Mounting type		assembly
Mounting type / mounting in cable duct		No
Certificates		
Certificate of suitability		
• VdS approval		Yes
General Product Approval		Declaration of Conformity



[sonstig](#)



Further information
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TC1296
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/5TC1296/all
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TC1296
CAX-Online-Generator http://www.siemens.com/cax
Tender specifications http://ausschreibungstexte.siemens.com/tiplv

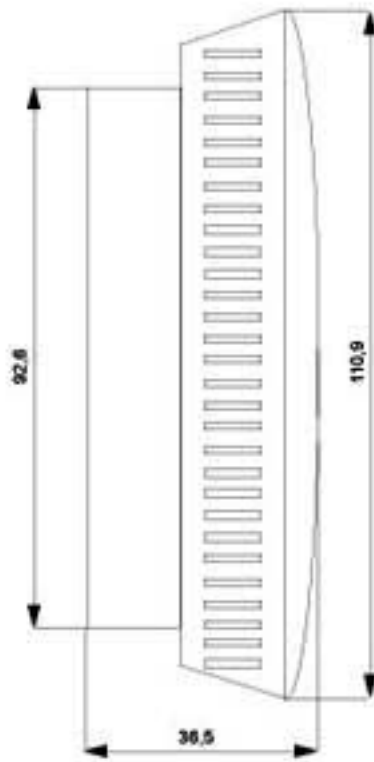

last modified:

11.12.2015